

# Indus rti



[www.indusrti.com](http://www.indusrti.com)

## INDUSTRIES WE SERVE



**AGGREGATE  
& MINING**



**CEMENT**



**STEEL / METALS**



**ENERGY /  
THERMAL POWER**



**FERTILIZER  
& CHEMICALS**



**PORTS**



**AGRICULTURE**




**TIMBER / LUMBER**




**SCRAP / RECYCLING**

## TYPES OF RUBBER SHEET

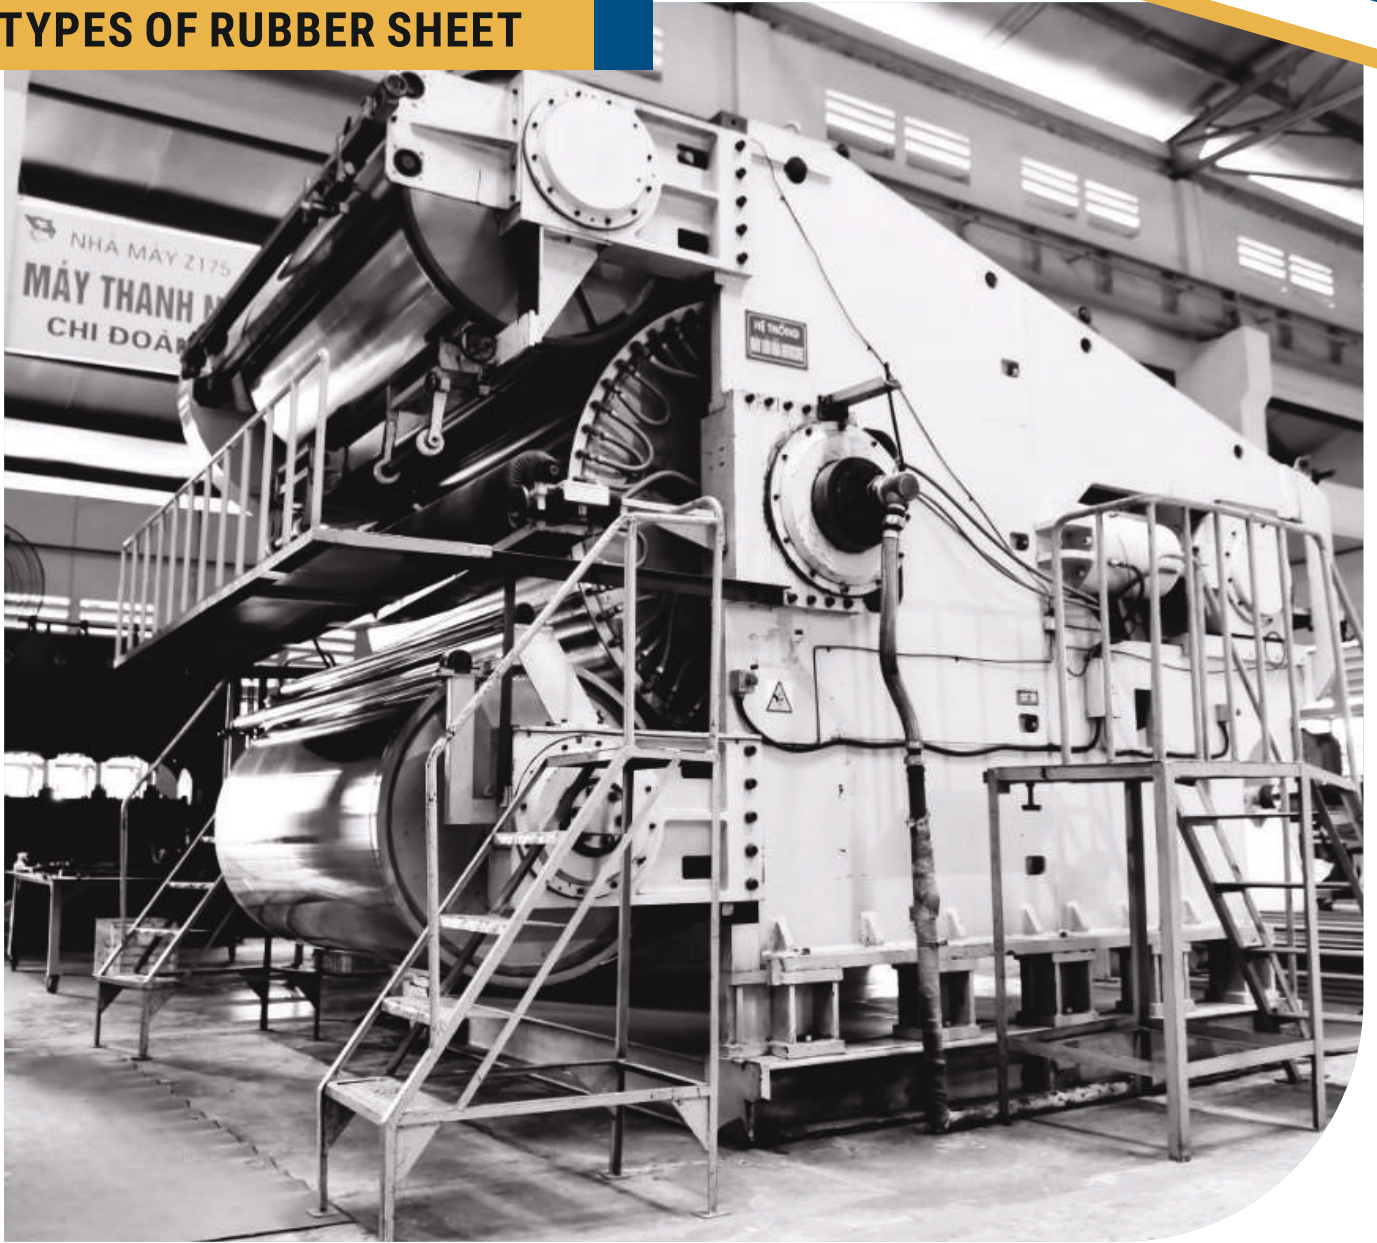

Rotocure continuous vulcanizing machine system

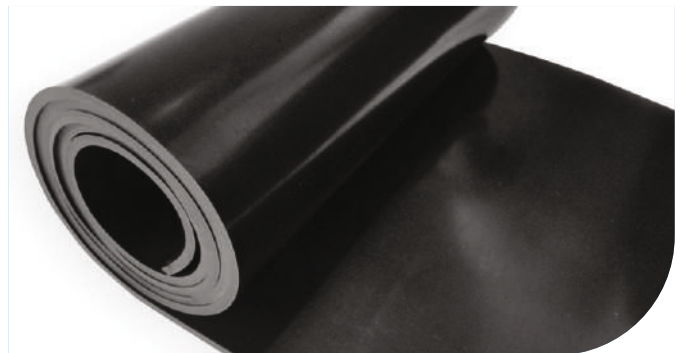

Rubber sheet

### SCOPE OF USE

Used to make soft dams to block water on rivers, lakes, making tanks, soft tanks for water, fuel, chemicals,...  
Manufactured according to NF EN 22286, NF G37103 ÷ 37129 and TQSA standards.

## Natural Rubber Sheet



Natural rubber with optimal elastic resilience and resistance to wear, cutting, and laceration. Exceptional Elongation against breakage. Widely used in various industrial seals. Super abrasion resistance, excellent resistance to impact, cut and tear, outstanding tensile strength, high resilience.

Thickness: 1mm to 50mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C	Abrasion mm <sup>3</sup>
Natural rubber sheet	40 +/-5	1.05	20	650%	-25 ~ 80	120
Natural rubber sheet	45 +/-5	1.2	15	400%	-25 ~ 80	120
Natural rubber sheet	50 +/-5	1.3	8	300%	-25 ~ 80	150
Natural rubber sheet	50 +/-5	1.35	5	300%	-25 ~ 80	150

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## SBR Rubber Sheet



Good resistance to abrasion, high temperature, and aging. It is used for gaskets, flooring and etc. Suitable for current use where particular resistances to atmospheric agents, oils and heat are not required.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
SBR rubber sheet	70 +/-5	1.7	2	180%	-20 ~ 80
SBR rubber sheet	65 +/-5	1.6	2.5	200%	-20 ~ 80
SBR rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 80
SBR rubber sheet	80 +/-5	1.5	3	200%	-20 ~ 80
SBR rubber sheet	60 +/-5	1.4	5	250%	-20 ~ 80
SBR rubber sheet	60 +/-5	1.35	6	250%	-20 ~ 80
SBR rubber sheet	50 +/-5	1.35	6	300%	-20 ~ 80

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## NBR Rubber Sheet



Nitrile rubber known as NBR, Buna-N, proving excellent resistance to petroleum oils as well as mineral and vegetable oils. NBR rubber sheet widely use in automotive and aeronautical industry to make fuel and oil seals, self-sealing feul tanks lining.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm3	Tensile Strength Mpa	Elongation %	Temperature Range °C
NBR rubber sheet	80 +/-5	1.5	4	200%	-20 ~ 100
NBR rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 90
NBR rubber sheet	65 +/-5	1.5	4	250%	-20 ~ 90
NBR rubber sheet	65 +/-5	1.4	5	250%	-20 ~ 90
NBR rubber sheet	65 +/-5	1.4	6	300%	-20 ~ 100
NBR rubber sheet	65 +/-5	1.4	8	300%	-20 ~ 100
NBR rubber sheet	60 +/-5	1.4	10	300%	-20 ~ 110
NBR rubber sheet	50 +/-5	1.35	10	300%	-20 ~ 110

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Neoprene Rubber Sheet (CR Rubber Sheet)



Neoprene rubber sheet is a polymer that provides moderate oil&gasline resistance, very good resistance to ozone&sunlight, excellent adhesion to fabric&metal, good resistance to abrasion&flex cracking and very good resistance to alkalis&acids.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm3	Tensile Strength Mpa	Elongation %	Temperature Range °C
Neoprene rubber sheet	80 +/-5	1.5	4	200%	-20 ~ 80
Neoprene rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 80
Neoprene rubber sheet	65 +/-5	1.5	4	250%	-20 ~ 80
Neoprene rubber sheet	65 +/-5	1.4	5	250%	-20 ~ 90
Neoprene rubber sheet	65 +/-5	1.4	6	300%	-20 ~ 100
Neoprene rubber sheet	65 +/-5	1.4	8	300%	-30 ~ 100
Neoprene rubber sheet	60 +/-5	1.35	10	300%	-30 ~ 100

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## EPDM Rubber Sheet



EPDM rubber sheet has excellent resistance to weathering and ozone, and very good aging resistance, which makes it perfect material to use under exposed environment. They are highly recommended at areas where surface is exposed to weather, sunlight, heat, ozone or gasses.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
EPDM rubber sheet	80 +/-5	1.5	4	200%	-20 ~ 110
EPDM rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 110
EPDM rubber sheet	65 +/-5	1.5	4	250%	-20 ~ 110
EPDM rubber sheet	65 +/-5	1.4	5	250%	-30 ~ 120
EPDM rubber sheet	65 +/-5	1.4	6	300%	-30 ~ 120
EPDM rubber sheet	65 +/-5	1.4	8	300%	-20 ~ 120
EPDM rubber sheet	60 +/-5	1.4	10	300%	-40 ~ 130
EPDM rubber sheet	50 +/-5	1.35	10	300%	-40 ~ 130
EPDM rubber sheet	45 +/-5	1.35	10	300%	-40 ~ 130

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## EPDM Foam Rubber Sheet



EPDM foam rubber sheets are widely used in wall construction, refrigeration, transportation, industrial pipelines and other places requiring heat insulation, leopard print, sound insulation, sound absorption and shock absorption.

Thickness: 3mm to 50mm  
 Width: 1m  
 Length: 1m to 20m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
EPDM foam rubber sheet	15 +/-5	0.4	0.7	250%	-60 ~ 135
EPDM foam rubber sheet	25 +/-5	0.5	0.7	250%	-60 ~ 135
EPDM foam rubber sheet	35 +/-5	0.6	0.7	250%	-60 ~ 135
EPDM foam rubber sheet	35 +/-5	0.8	0.8	250%	-40 ~ 120

- All colors available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## FKM Rubber Sheet



FKM rubber sheet is high performance rubber with excellent resistance to hydrocarbons, chemicals, oil and heat. It also has outstanding resistance to compression, especially at elevated temperature. It is used for mechanical seals, pumps, reactors, agitators, compressor housings, valves, various instruments and other equipment. Usually used for packing, diaphragm and gasket of valve seat and valve stem.

Thickness: 1mm to 50mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
FKM rubber sheet	75 +/-5	2	6	200%	-20 ~ 220
FKM rubber sheet	75 +/-5	2	9	200%	-20 ~ 220
FKM rubber sheet	55 +/-5	1.85	6	500%	-20 ~ 220
FKM rubber sheet	90 +/-5	1.9	7	250%	-20 ~ 220

- Intermittent work up to 260 °C
- All colors available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## HNBR Rubber Sheet



Hydrogenated Nitrile is also known as saturated Nitrile, is obtained by introducing Hydrogen into the Nitrile to saturate the hydrocarbon chains in the rubber. It has better wear and extrusion resistance than NBR and has good chemical compatibility.


Used for all oil resistant applications, such as oil well, oil equipment, automotive fuel handling systems and other chemical field.

Thickness: 1mm to 50mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
HNBR Rubber Sheet	65 +/-5	1.5	10	250%	-40 ~ 150

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Silicone Rubber Sheet



Excellent high and low temperature range without failure, making it very thermally stable material and flame retardant. Excellent electrical insulating properties, resistance to animal and vegetable oils, diluted acids, ozone, and oxidation and water absorption.

Thickness: 0.1mm to 30mm  
 Width: 1m to 3m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Map	Elongation %	Temperature Range °C
Silicone rubber sheet	40 +/-5	1.25	7	350%	-60 ~ 220
Silicone rubber sheet	55 +/-5	1.25	7	350%	-60 ~ 220
Fumed silicone rubber sheet	55 +/-5	1.25	10	550%	-60 ~ 260
Silicone rubber sheet	55 +/-5	1.25	7	400%	-60 ~ 300

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Silicone Foam Rubber Sheet



Silicone sponge rubber materials are excellent materials for gasket and padding applications that require a soft, compressible material. The closed and partially-open cells of these sponges prevent water absorption. These materials also provide the ozone, weather and UV resistance typical of silicone.

Thickness: 1mm to 50mm  
 Width: 1m, 1.2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Map	Elongation %	Temperature Range °C
Silicone Foam Rubber Sheet	25 +/-5	0.4-0.5	250	180%	-60 ~ 220
Silicone Foam Rubber Sheet	30 +/-5	0.6-0.8	250	200%	-60 ~ 220
Silicone Foam Rubber Sheet	35 +/-5	0.9-1	300	250%	-60 ~ 250

- All colors available.
- Cloth impression finish available.
- Smooth surface finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Butyl Rubber Sheet (IIR Rubber Sheet)



Butyl rubber has good weather resistance, ozone aging resistance, heat aging resistance, excellent polar solvent resistance and water resistance, good point insulation and high air tightness. It is used for equipment sealing projects, industrial and mining enterprises, pipeline sealing, and can also be used as machine gasket, automobile seal, surface laying, buffer gasket, industrial water pipe seal, oil pipe seal, etc.

Thickness: 1mm to 50mm  
 Width: 1m-2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
Butyl Rubber Sheet	55 +/-5	1.5	4	300%	-60 ~ 120

Acid and alkali resistance : 30% H<sub>2</sub>SO<sub>4</sub> and 30% NaOH in 24hours\*7days

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Hypalon Rubber Sheet



Hypalon rubber sheeting has excellent resistance to ozone, weather, acids, heat and abrasion, and properly compounded products show excellent weathering resistance. High tensile strength is characteristic of hypalon vulcanizate. Hypalon rubber also has fair resistance to petroleum based fluids.

Compounds can be formulated for excellent abrasion resistant and for brittle temperatures for -30 ° C to +180 ° C. Its general Shore Hardness is 65 ± 5 °. Hypalon vulcanizates show excellent resistance to corrosive chemicals. They have excellent electrical properties. They can also be compounded for good flame resistance.

Thickness: 1mm to 50mm  
 Width: 1m-2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
Hypalon Rubber Sheet	70 +/-5	1.5	6	300%	-60 ~ 135

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Insulating Rubber Sheet



Electrical rubber mats are made of specially compounded non-conductive material, designed to prevent human from electric shock working. It can be used on floors around control panels, switch boards, transformers and other high voltage workplace which are prone to electric current.

Thickness: 3mm to 50mm  
 Width: 1m-2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

Thickness mm	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C	Withstand Voltage KV
3mm	65 +/-5	1.5	4	300	-20 ~ 80	10
6mm	65 +/-5	1.5	4	300	-20 ~ 80	25
9mm	65 +/-5	1.5	4	300	-20 ~ 80	35
12mm	65 +/-5	1.5	4	300	-20 ~ 80	45

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available
- Custom specifications, shapes and sizes available.
- Different patterns are available.
- New product formula can be designed by request.

## Flame Retardant Rubber Sheet



Our flame retardant rubber sheet is a premium-grade neoprene material that has been manufactured to fully conform to UL94-V0 standards. Using this product can greatly help to reduce the spread of flame as well as reducing the smoke density and toxicity. We can also produce this material in a variety of formats such as; full rolls, strip cut lengths and bespoke gaskets and shapes.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Grade
Flame retardant rubber sheet	70 +/-5	1.5	4	200%	UL94-V0

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Oil Resistant Rubber Sheet



Oil resistant rubber sheets are products which have at base nitrile-butadiene rubber resistant to fuel. Can be manufactured also from SBR and NBR compound, resistant at mineral oils and vegetal fats. Very good resistance to oil and gasoline; superior resistance to petroleum-based hydraulic fluids; wide range of service temperatures; good resistance to hydrocarbon solvents.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C	Grade
65 +/-5	1.5	4	250%	-20 ~ 100	Timely cleaning oil drop
65 +/-5	1.4	5	350%	-20 ~ 100	Resistant to gasoline
65 +/-5	1.3	10	400%	-20 ~ 100	Resistant to gasoline, engine oil and diesel, can be soaked for a long time

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Abrasion Resistant Rubber Sheet



Abrasion-resistant rubber sheet is highly resistant to corrosion, and also give excellent resistance to impact. They also have a wide range of temperatures within which they can operate without any problems. We supply abrasion resistant rubber sheeting in a range of different grades and to an array of different industries. Quarry linings, mining applications, chute lining, target backing curtains and many more.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C	Abrasion mm <sup>3</sup>
Natural rubber sheet	40 +/-5	1	22	650%	-20 ~ 80	60
Natural rubber sheet	40 +/-5	1.05	20	650%	-20 ~ 80	120
Natural rubber sheet	60 +/-5	1.2	15	300%	-20 ~ 80	90
Natural rubber sheet	65 +/-5	1.25	10	300%	-20 ~ 80	150

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Acid and Alkali Resistance Rubber Sheet



Acid-resistant rubber sheets have excellent performance against alkalis, acids, and gases. This characteristic of acid-resistant rubber, along with its flexibility and endurance against aging makes it frequently used rubber for many industrial applications.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
Acid and alkali resistance rubber sheet	70 +/-5	1.5	4	280%	-60 ~ 120

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## High-temperature Rubber Sheets



Excellent high and low temperature range without failure. The best oil resistance, high temperature resistance, anti-chemical corrosion and aging resistance.

Thickness: 0.1mm to 30mm  
 Width: 1m to 3m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m



Material	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
Silicone rubber sheet	40 +/-5	1.25	7	350%	-60 ~ 220
Silicone rubber sheet	55 +/-5	1.25	7	400%	-60 ~ 300
FKM rubber sheet	70 +/-5	2	6	200%	-60 ~ 220

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## High Tear-resistance Rubber Sheet



High tear-resistance rubber sheet it is a silicone membranes for vacuum presses machine. Our high-quality silicone rubber membranes are suitable for all types of vacuum membrane presses and solar laminators.

The silicone membranes for vacuum presses have an elasticity of 700%. The silicone sheets for laminating machines have high resistance to tearing, dynamic tension, and compression loads.

Thickness: 1mm to 10mm  
 Width: 1m to 3m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
High tear-resistance rubber sheet	40 +/-5	1.25	10	700%	-60 ~ 260

- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Aging Resistant Rubber Sheet



EPDM rubber sheet has excellent resistance to weathering and ozone, and very good aging resistance, which makes it perfect material to use under exposed environment. They are highly recommended at areas where surface is exposed to weather, sunlight, heat, ozone or gasses.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C	Grade
65 +/-5	1.35	7	350%	-30 ~ 120	Mainly used for gasket, dam protection, bridge support and roof protection
65 +/-5	1.2	10	450%	-40 ~ 130	Used on outdoor place with high requirements and long service time

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Food Grade Rubber Sheet



Usually we have four most popular food-grade rubber materials: Neoprene, EPDM, NBR and silicone, they have many characteristics in common; they are all recommended for repeated food contact, are manufactured with non-toxic and non-allergenic materials.

Thickness: 1mm to 100mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m, 20m

	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
Food grade Neoprene rubber sheet	65 +/-5	1.5	5	300%	-20 ~ 100
Food grade EPDM rubber sheet	65 +/-5	1.5	5	300%	-20 ~ 120
Food grade NBR rubber sheet	65 +/-5	1.5	5	300%	-20 ~ 100
Food grade Silicone rubber sheet	55 +/-5	1.25	7	400%	-60 ~ 220

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.


## Cloth Inserted Rubber Sheet

Cloth inserted Rubber sheet is a rubber sheet with a polyester, nylon, cotton, or fiberglass fabric impregnated in the rubber. Cloth reinforcement improves dimensional stability in flange gasket applications with high compression loads. The fabric helps to reduce tearing when fastened. This gives the rubber more reinforcement support and added stability in gasket applications requiring mechanical fastening and high compression.

Thickness: 0.1mm to 30mm  
 Width: 1m to 3m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m



Cotton Cloth Inserted



Nylon Inserted



Nylon Inserted



EP Fabric Insertion

- All colors available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

## Skirt-board Rubber Sheet



Skirt-board is a sturdy sheet product designed for use as a general industrial padding and gasket. Typical applications include street sweepers, abrasion resistant applications, snowplow blades, airfield applications, bet wiper.

Thickness: 1mm to 100mm  
 Width: 20mm to 2m  
 Standard width: 100mm, 150mm, 200mm,250mm  
 Length: 1m to 50m  
 Standard length: 5m,10m

	Hardness Shore A	Density g/cm3	Tensile Strength Mpa	Elongation %	Temperature Range °C
Skirt-board rubber sheet	65 +/-5	1.5	3	250%	-20 ~ 120
Skirt-board rubber sheet	65 +/-5	1.4	6	300%	-20 ~ 120
Skirt-board rubber sheet	65 +/-5	1.3	10	350%	-20 ~ 120
Skirt-board rubber sheet	40 +/-5	1.05	20	650%	-20 ~ 80

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.

## Rubber Block



Rubber block can be used wet or dry without the chance of slipping. It allows one to remove dents and straighten metals without distorting or scratching the surface. This block is very handy for hammering, filing and other uses.

Thickness: 1mm to 100mm  
 Width: 40mm to 2m  
 Standard width: 100mm, 150mm, 200mm,250mm  
 Length: 1m to 50m  
 Standard length: 5m,10m

	Hardness Shore A	Density g/cm3	Tensile Strength Mpa	Elongation %	Temperature Range °C
Rubber Block	65 +/-5	1.5	3	250%	-20 ~ 110
Rubber Block	65 +/-5	1.4	6	300%	-20 ~ 110

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- Test methods accord with ISO standard.
- New product formula can be designed by request.

# Anti-slip rubber mat

Anti-slip rubber mat rough surface helps to promote safety and is one of the most cost-effective methods of improving workplace health and safety.

1. Non-slip rubber sheet, all kinds of patterns on its surface, look elegant;
2. Featured by shock absorption, noise reduction, pressure resistance, and wear resistance;
3. Safe, Eco-friendly, water-proof, fire-proof and anti-skid;
4. Easy to be installed and maintained.

Thickness: 3mm to 6mm  
 Width: 1m to 2m  
 Standard width: 1m, 1.2m  
 Length: 1m to 50m  
 Standard length: 5m, 10m

Material	Hardness Shore A	Density g/cm <sup>3</sup>	Tensile Strength Mpa	Elongation %	Temperature Range °C
SBR/NR	65 +/-5	1.5	3	250%	-20 ~ 120



JRAS01



JRAS02



JRAS03



JRAS04



JRAS05



JRAS06



JRAS07



JRAS08




JRAS09



JRAS10



JRAS11



JRAS12



JRAS13




JRAS14



JRAS15

- All colors available.
- Cloth insertion, nylon insertion available.
- Cloth impression finish available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

# Anti Static Rubber Mat

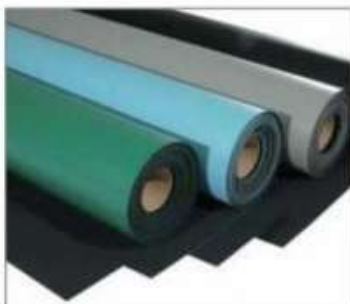

Our anti static rubber mat manufactured using electrostatic conductive materials, electrostatic dissipative material and synthetic rubbers. Our ESD matting is often used in high grade laboratories and workshops for electronic semiconductor devices, computers communication devices, and integrated circuits, as a table top mat, work surface mat, shelf mat or floor mat.



Type: 2 layers; 3 layers  
 Thickness: 2mm; 3mm; 5mm  
 Length: 5m -30m  
 Width: 0.6-1.2m  
 Standard size: 2mm x 0.6m x 10m; 2mm x 0.9m x 10m;  
 2mm x 1.0m x 10m; 2mm x 1.2m x 10m  
 Pattern: Smooth or textured  
 Specific Gravity: 1.5g/cm<sup>3</sup>  
 Color: Blue+Black, Grey+Black, Green+Black  
 Surface resistivity of the top layer: 10<sup>6</sup>-10<sup>9</sup> Ohms  
 Surface resistivity of the bottom layer: 10<sup>3</sup>-10<sup>5</sup> Ohms  
 Typical Value Tensile: 3.0Mpa  
 Elongation: 260%

Standard size	Surface Resistivity	Underlying Resistance	Thickness (mm)	Width (m)	Length (m)
2mm	10 <sup>6</sup> -10 <sup>9</sup> Ω	10 <sup>3</sup> -10 <sup>5</sup> Ω	2-10	0.5-1.2	5-30
3mm	10 <sup>6</sup> -10 <sup>9</sup> Ω	10 <sup>3</sup> -10 <sup>5</sup> Ω	2-10	0.5-1.2	5-30
5mm	10 <sup>6</sup> -10 <sup>9</sup> Ω	10 <sup>3</sup> -10 <sup>8</sup> Ω	2-10	0.5-1.2	5-30

## Top Surface



## Bottom Surface




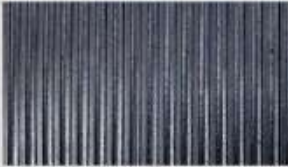















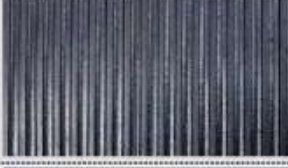

- All colors available.
- Cloth impression back surface and pattern front surface available.
- Custom specifications, shapes and sizes available.
- New product formula can be designed by request.

# Animal Stable Rubber Mat

Widely used in the the cow lie tent, milking parlour, delivery room, stables, softball field. The ribbed bottom can greatly increases potential drainage and prevents liquid from collecting under the mats. It also allows you to use both side of the matting, which helps to greatly increase the life expectancy of the product.


- 1, Provide an excellent anti slip surface.
- 2, Embossed top surface provides traction and prevents animal getting injury from slipping.
- 3, Grooved bottom is effective for drainage.
- 4, Piece cut and interlocking system are available.
- 5, It increases comfort for animal and is easy to clean with little maintenance.


Item	Surface	Back	Specifications
JRACM01			Size: 12mm*1.22m*1.83m 17mm*1.22m*1.83m 10mm*1m*2m 15mm*1m*2m 17mm*1m*2m
JRACM02			Size: 12mm*1.22m*1.83m 17mm*1.22m*1.83m
JRACM03			Size: 12mm*1.22m*1.83m 15mm*1.22m*1.83m 18mm*1.22m*1.83m
JRACM04			Size: 17mm*1.22m*1.83m
JRACM05			Size: 12mm*1.22m*1.83m 17mm*1.22m*1.83m
JRACM06			Size: 17mm*1.22m*1.83m
JRACM07			Size: 30mm*1.22m*1.83m

Item	Surface	Back	Specifications
JRACM08			Thickness: 17mm-25mm Width: 1m-2m Length: 1m-50m Nylon insertion available
JRACM09			Thickness: 17mm-25mm Width: 1m-2m Length: 1m-50m Nylon insertion available
JRACM10			Thickness: 17mm-25mm Width: 1m-2m Length: 1m-50m Nylon insertion available
JRACM11			Thickness: 8mm-25mm Width: 1m-2m Length: 1m-50m Nylon insertion available
JRACM12			Thickness: 19mm-25mm Width: 1.83m Length: 1m-50m Nylon insertion available
JRACM13			Thickness: 12mm-25mm Width: 1.22m Length: 1.83m
JRACM14			Thickness: 17mm-25mm Width: 1m-2m Length: 1m-50m Nylon insertion available
JRACM15			Thickness: 17mm-25mm Width: 1m-2m Length: 1m-50m Nylon insertion available
JRACM16			Thickness: 23mm-30mm Width: 2m Length: 1m-50m Nylon insertion available
JRACM17			Thickness: 33mm Width: 1.22m Length: 1.83m

# Other Rubber Products

We have rich experience in providing rubber application solution and custom service such as custom colors, sizes, shape, molded parts, making holes etc. based on custom.

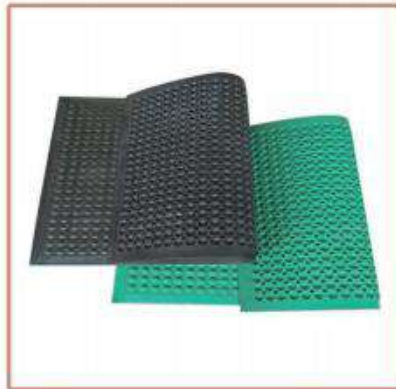

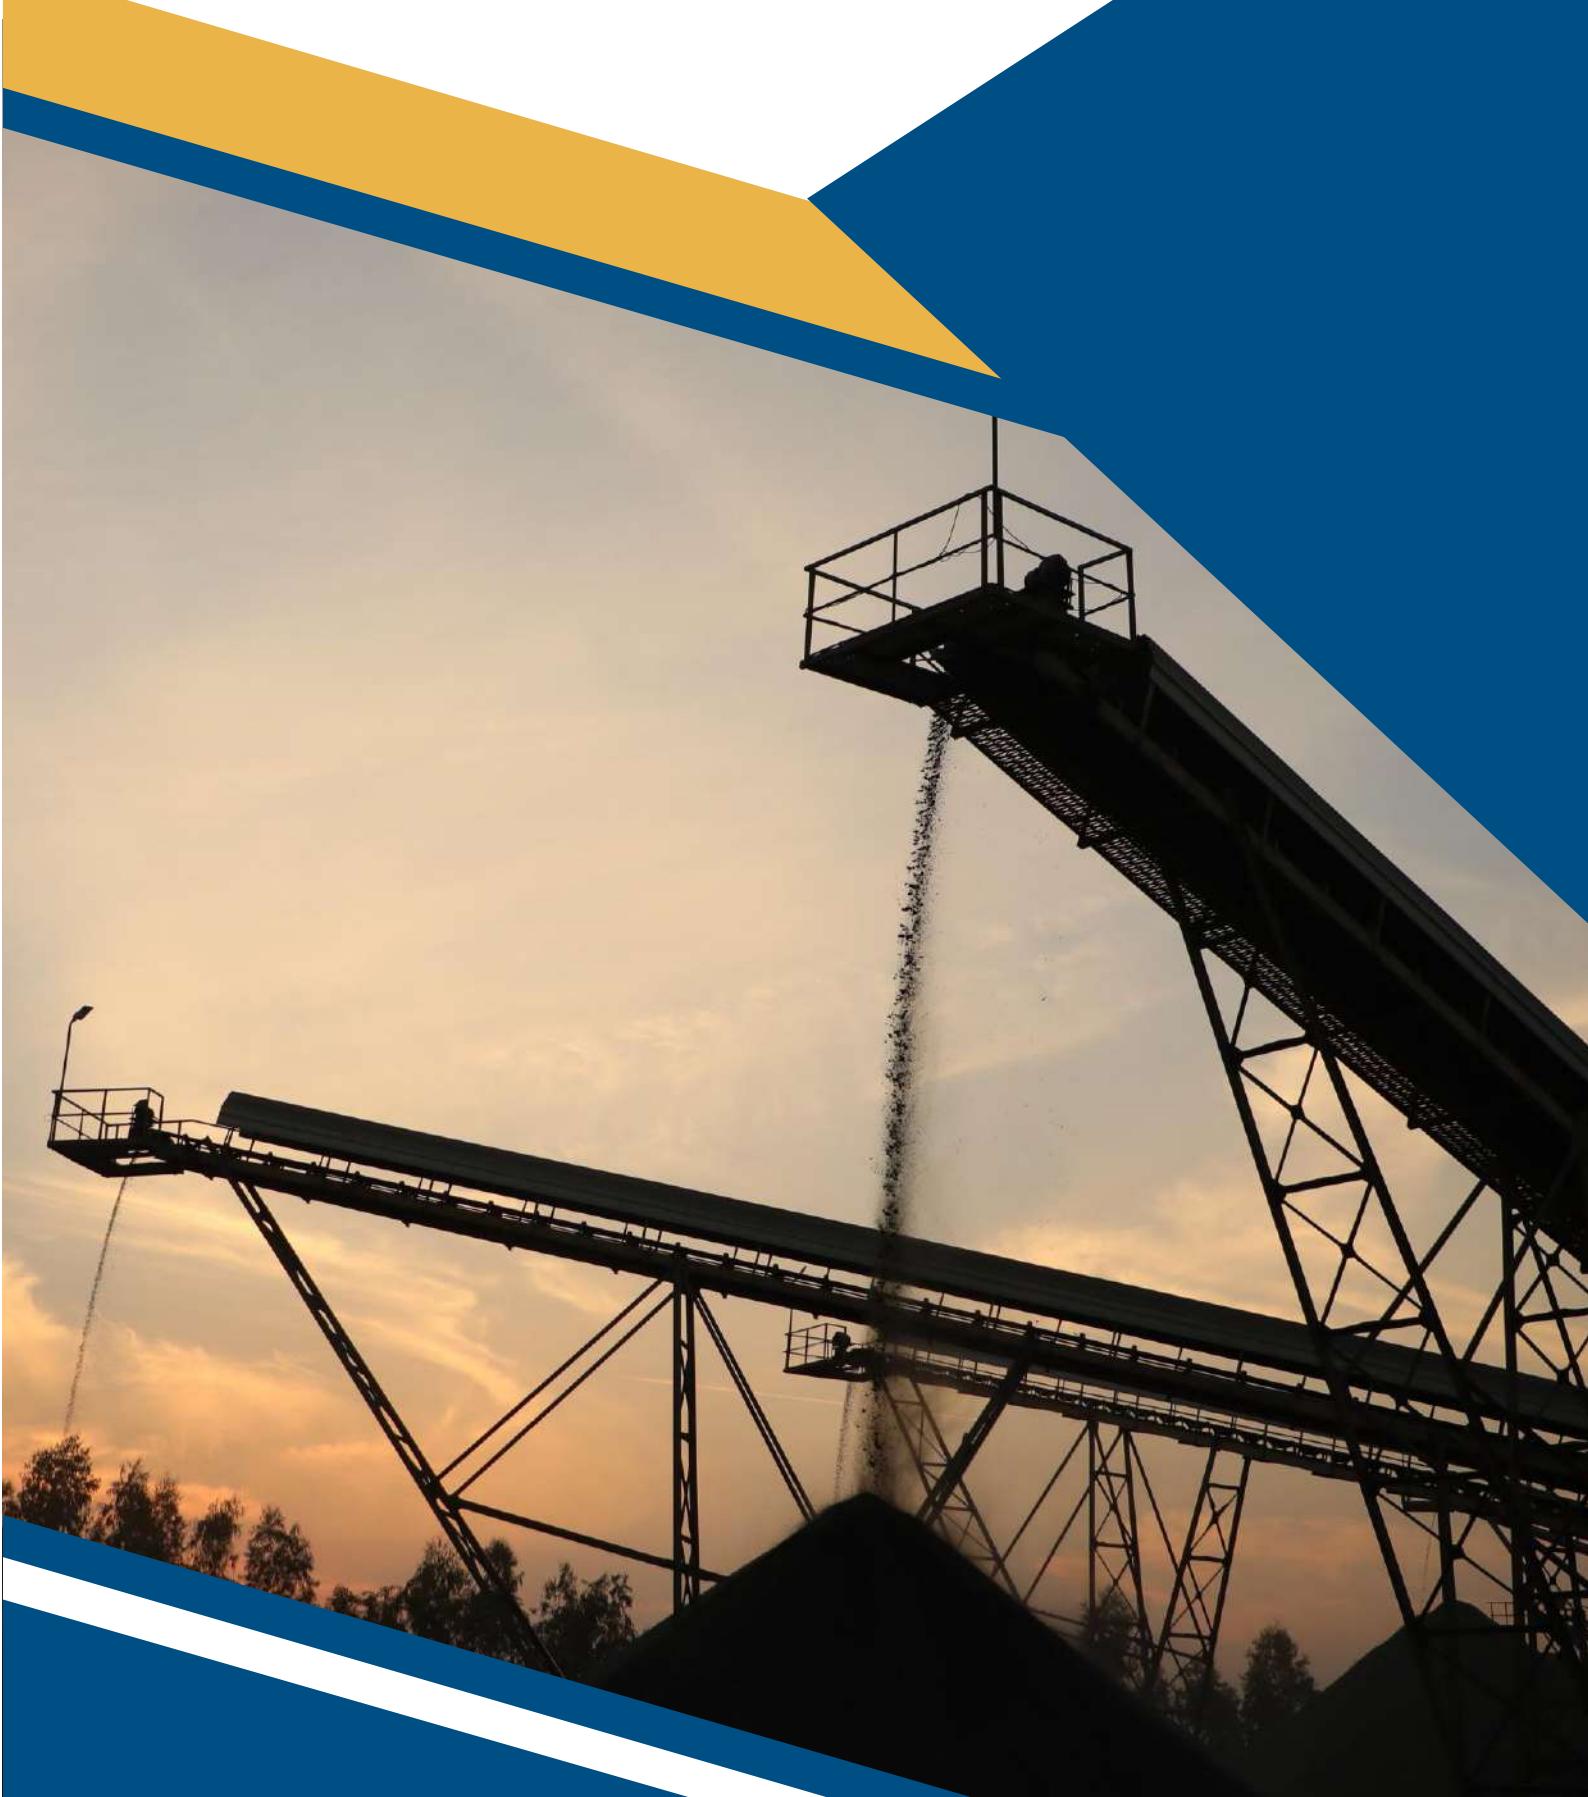

# Indus rti

**Head Office:**

Office No. 1951, Tamani Arts Building, Al Asayel St.,  
Business Bay, Dubai - U.A.E.

**Email:** [info@indusrti.com](mailto:info@indusrti.com)  
[admin@indusrti.com](mailto:admin@indusrti.com)